

SPOILERBLADEZ

Please note: Spoilerbladez can be installed different ways depending on your current setup. Below are 3 examples.

Contents of your package:

- 2 Specially cut Spoilerbladez LED's with end connector.
- 12" extension
- 2 primer stick
- 2 alcohol pads

Installing the Spoilerbladez.


With extension connected, test your Spoilerbladez LED to any 12v battery to ensure its functionality. Test fit your position. Clean black spoiler surface with alcohol thoroughly and let dry. Using one of the primer stick, pinch and apply primer to area where the LED's will be adhered to. Use entire stick per side.

Option 1 fusebox relay install - If you've purchased an FZ-1 fusebox, combine both left and right wires together, run it to fusebox and insert a 5amp fuse to the (switched) relay side. This will turn the inlaid LED's on when you turn on the key

Option 2 If you have one of our 1 ch or 4ch remote you have to extend the wire, combine both left and right LED and run wire up to your remote receiver. Compatible with any 1color remote

Option 3 (Must have OEM relay kit \$39.95 purchased from TricLED.com) use factory foglight harness which is near the front bottom of Slingshot, one on each side of the main frame there is an open plug 2 pin harness. Insert OEM harness from the kit. You will have an open end on the harness that you can use in the future. You will have 2 wires with a female bullet end receiver. Crimp the supplied bullet terminal and plug bullet terminal to the female opening on the OEM harness. Be sure to use Dielectric grease on all connectors to prevent oxidation.

1. Lift up the top center console on both sides slightly.
2. From the top of the radio, push down and pull out from the top.
3. Remove radio.
4. Locate harness marked foglight
Insert provided switch into dash and plug in foglight harness.
5. Remove fuse box cover and insert relay and 10 amp fuse
6. Insert your OEM harness
Crimp your bullet terminal, use dielectric grease on all connectors and insert into the female bullet connector on the supplied OEM harness. You can use the other end of the OEM harness to connect other LED's or accessory lighting in the future.

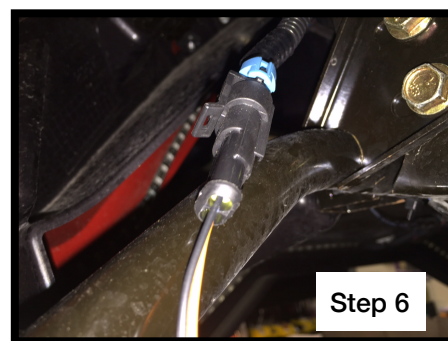

THANK YOU FOR YOUR PATRONAGE. IF YOU HAVE ANY QUESTIONS PLEASE CONTACT US AT 954-908-7850 OR SALES@TRICLED.COM

To install Slingbladez please follow the steps below


Option 4 Purchase the optional splitter wiring kit \$24.95. If you already have the top dual color LED eyebrow you can install this additional splitter and turn your lower spoiler into a switchback also. (Sold Separately)



DRL White mode



Blinker mode

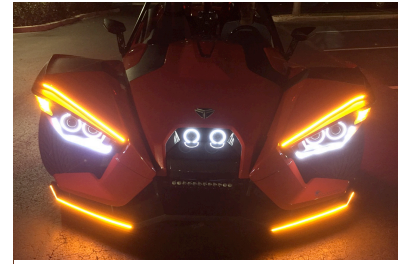


Hazard mode



When installing your SpoilerBladez, adhere the wire end first. Pass the led tube beyond the edge of factory spoiler by 1/4" to allow the wire to freely exit the tube and straight into the back of the spoiler. Apply the LED parallel to the bottom of the spoiler. Do not stretch the tube as you install, push towards the wire side to ensure no stretching of the material. It is also normal to see a bit of spacing from LED to the end of the tube when your finished.



Route your wires neatly through the factory tubing and zip tie towards the front edge to keep everything looking clean and neat. See above and decide which is the best way to connect to your SS.

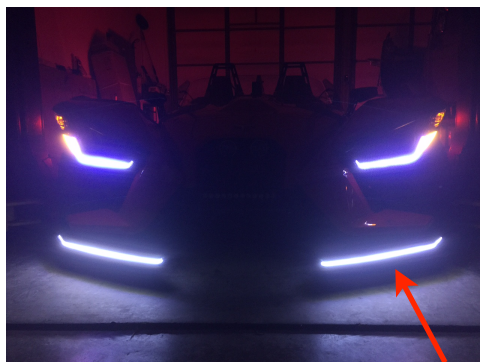

THANK YOU FOR YOUR PATRONAGE. IF YOU HAVE ANY QUESTIONS PLEASE CONTACT US AT 954-908-7850 OR SALES@TRICLED.COM