
6 Easy Steps



Remove lower dash panel and locate Ignition Switch Connector. Seperate Connector ends.



Attach Keyless Ignition Power Harness mating connectors to both ends of Ignition Switch connector

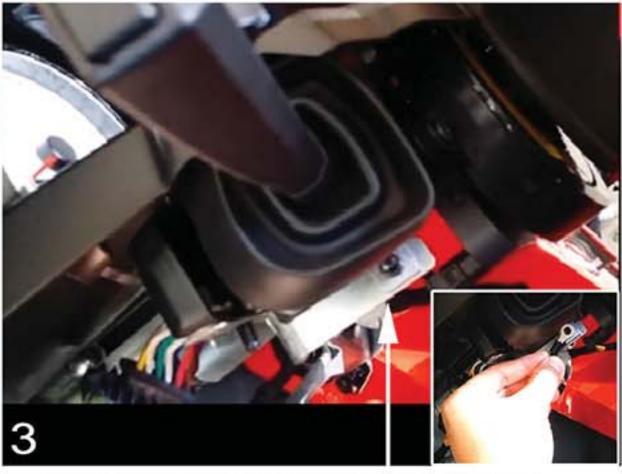


Locate the hex key GROUND bolt under the steering column. Attach the Keyless Ignition Ground lug to the bolt and tighten.



Remove 4 face plate bolts and unplug and remove the Slingshot Infotainment Center



Remove the switch knockout plate in your dash and insert the new ON / OFF factory style rocker switch included in the kit.

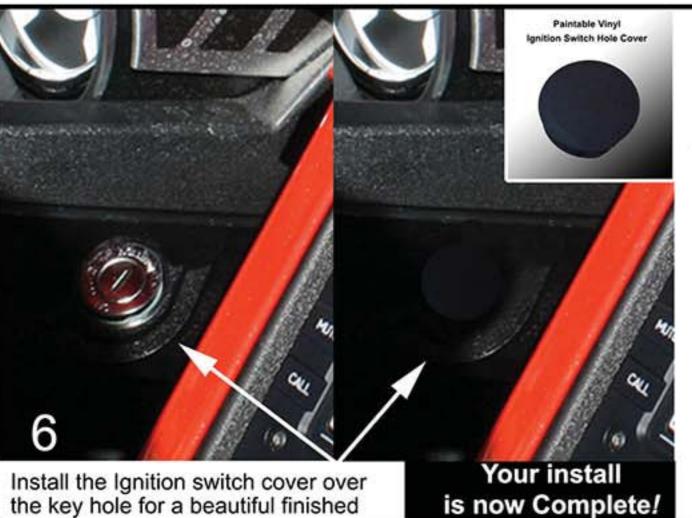

To operate your Keyless Ignition system:

Simply put the RFID Dawg Tag into "Automatic" Mode, As you approach your Slingshot's Ignition will authorize. Just get in, flip the rocker switch to ON, Push the start button and your engine roars to life!





